WUNDERLICH

DURATILE

(REG'D)

ASBESTOS CEMENT WALL TILE SHEETING
FOR BATHROOM AND KITCHEN INTERIORS

THE QUICK, EASY AND INEXPENSIVE WAY
TO HAVE GLISTENING TILE-LIKE WALLS

WUNDERLICH LIMITED

MANUFACTURERS OF BUILDING MATERIALS OF QUALITY

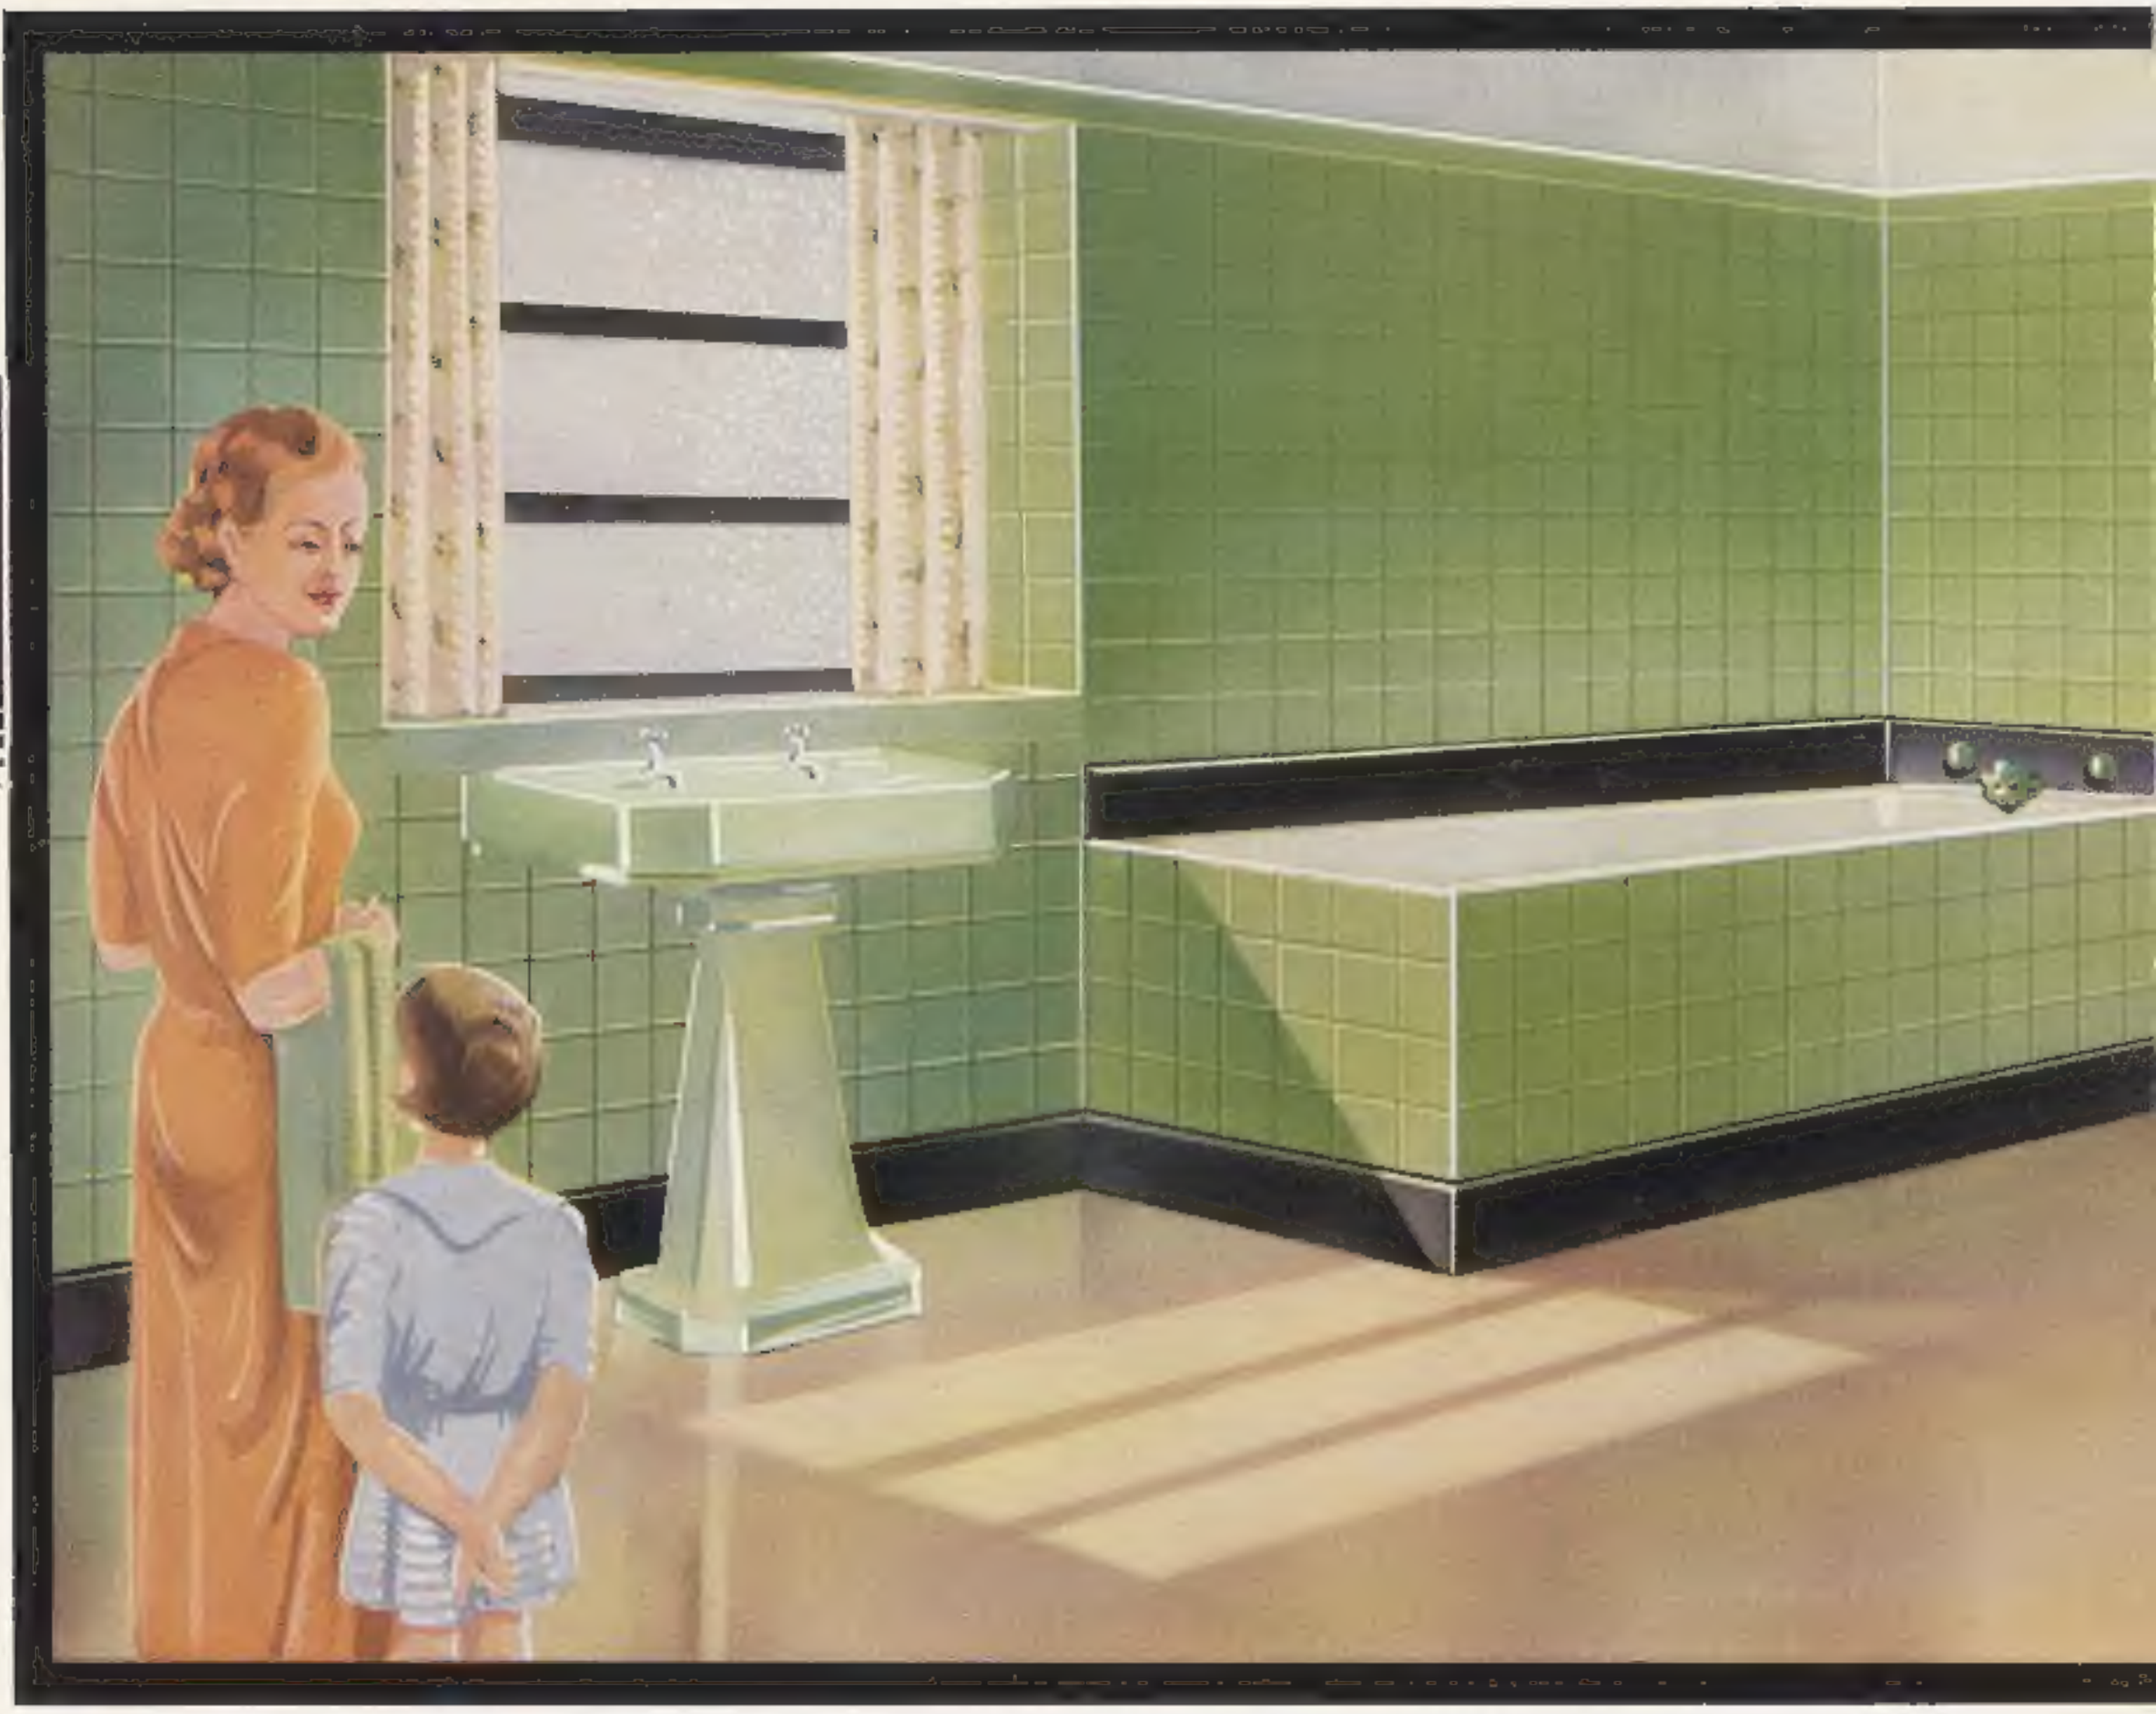

WUNDERLICH

DURATILE (Reg'd)

offers all the advantages of Ceramic Tiles—at much lower cost. The above illustration shows that there is no limit to the artistic and modern effects appropriate decoration will provide. Apart from its use in new construction, Duratile is ideal for remodelling old Bathroom and Kitchen interiors. It is fire-resisting, vermin proof, and cannot sag, flake, or rust, and is permanently durable.

Asbestos-cement w

BEAUTIFUL tile-like walls

to Bathrooms & Kitchens.

INEXPENSIVE MODERN WALLS THAT ARE EASILY FIXED AND QUICKLY PAINTED TO SUIT ANY DECORATIVE SCHEME

WUNDERLICH DURATILE is an Asbestos-Cement sheeting prepared to simulate 4" x 4" Ceramic Wall Tiles. DURATILE is supplied ready for direct application to all interior walls or partition treatments to Bathrooms and Kitchens.

Once installed and decorated with Paint or Enamel, DURATILE needs little attention. An occasional wiping over with a damp cloth will keep the finish spotless. The colour scheme can be inexpensively changed at any time by repainting.

DURATILE is economical in initial cost, is light in weight and transports compactly, thus enabling Country Clients to secure their requirements at moderate cost. Furthermore, it can be handled without fear of chipping as is the case with Tiles, and is fire-resisting and vermin proof.

all tile Sheeting

3-63412 TC 694 WUN

WUNDERLICH

DURATILE (Registered)

Asbestos Cement Wall Tile Sheeting

IS EASY TO FIX AND PAINT

Any handy man or tradesman using a hammer, saw, drill and screwdriver can fix Duratile easily and quickly. It is available, ready for erection, in the following waste-saving sheets, viz.:—

8' x 4' 7' x 4' 6' x 4' 5' x 4' 4' x 4'
8' x 3' 7' x 3' 6' x 3' 5' x 3' 4' x 3' 3' x 3'

and is approximately $\frac{3}{16}$" thick.

Should irregular or odd sizes be required, the sheets can be cut with a saw, or severed along the score marks by holding firmly on a flat bench with the surplus portion projecting and applying steady arm pressure along the surplus. Any rough edges can be smoothed down with a rasp or file.

Duratile is nailed with blunt point nails, or secured with nickel-plated countersunk round head screws direct to wall studs or timber framework. Space nails or screws evenly at approximately 18" centres.

Concrete, Brick, Stone or Plastered Walls must first be plugged and battened, with the battens placed so that they will provide a support behind and running in the direction of the joint of the sheets. At Internal and External Angles secure a batten vertically at each side of the angle. It is important that they be fixed true and level.

Duratile may be fixed by either of three methods, viz.:—

(1) Butt Jointed.
(2) Joints covered with Duratile (Asbestos-Cement) Cover Moulds and Angles.
(3) Joints covered with special metal joint and Internal and External Angle Strips.

On application, full particulars of any of these three methods will be furnished.

Where large sized sheets are used, secure the body of the sheet at 18" centres with nickel-plated screws or brads, through the score marks, not the plain surface of the sheet.

IMPORTANT: Where Duratile is fixed behind baths, basins, sinks, draining boards, etc., where moisture is likely to be constantly present, seal the bottom edge by setting in a plastic compound such as "Vulcatex." Force the edge down into the compound, so that some of the mixture is squeezed behind the sheet.

PAINTING DURATILE.

The following specification is recommended as providing generally the best and most lasting finish on Duratile. The surface of the sheeting has been already treated with a Cement sealer. It is essential that the sheets be thoroughly dry before painting is commenced.

(1) Apply one or two coats of flat undercoating.
(2) Lightly rub down and finish with one coat of enamel.

The material used for the various coatings must be of a recognised brand.

WUNDERLICH LIMITED

MANUFACTURERS OF BUILDING MATERIALS OF QUALITY

Showrooms:

SYDNEY ..... Baptist Street, Redfern
NEWCASTLE .... King St. (near Watt St.)
SOUTH MELBOURNE .... 210 Hanna St.
ADELAIDE.... Grote and Morphett Streets
Lord and Short Streets ..... PERTH
Amelia Street, Valley ..... BRISBANE
139 Macquarie Street ..... HOBART
71 St. John Street ..... LAUNCESTON

D 53 - 1/9/37

WILSON BROS. (PRINTERS) PTY. LTD.